



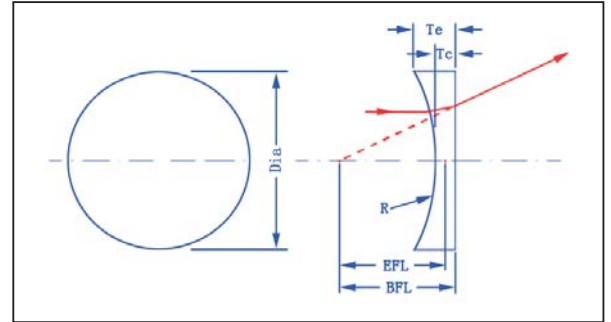

特性 Specification		
材料	Material	JGS1(UV-Grade Fused Silica)
设计波长	Design Wavelength	587.6nm
焦距公差	Focal Length Tolerance	±1%
外型公差	Diameter Tolerance	+0.0/-0.1mm
厚度公差	Thickness Tolerance	±0.1mm
面型	Surface Accuracy	$\lambda/4@632.8\text{nm}$
光洁度	Surface Quality	40-20
偏心	Centration	<3 arc min
有效孔径	Clear Aperture	>90%
倒边	Bevelling	<0.2×45°
镀膜	Coating	UV AR Coating 290nm-370nm

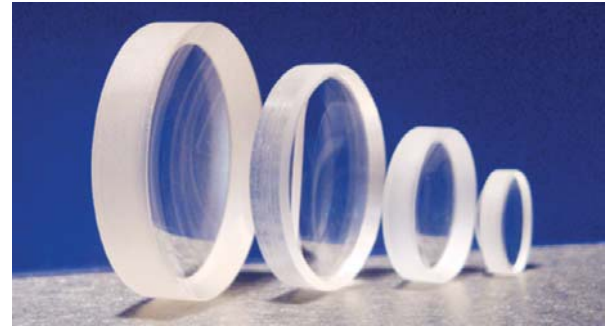

技术参数 TECHSPEC						
编号 No.	有效焦距 EFL(mm)	外圆直径 Dia(mm)	曲率半径 R1=R2(mm)	后焦距 BFL(mm)	中心厚度 Tc(mm)	边缘厚度 Te(mm)
12D4797R	-6.00	6.00	-5.87	-6.80	2.50	4.10
12D4148R	-12.00	6.00	-11.46	-12.99	3.00	3.80
12D4271R	-9.00	9.00	-8.63	-9.82	2.50	5.00
12D4014R	-18.00	9.00	-16.96	-19.00	3.00	4.20
12D4771R	-15.00	12.70	-14.21	-16.00	3.00	6.00
12D4650R	-25.00	12.70	-23.39	-26.01	3.00	4.80
12D4269R	-30.00	12.70	-27.98	-31.01	3.00	4.50
12D4511R	-50.00	12.70	-46.32	-51.02	3.00	3.90
12D4931R	-25.00	25.40	-23.39	-26.01	3.00	10.50
12D4293R	-50.00	25.40	-46.39	-51.19	3.50	7.00
12D4735R	-75.00	25.40	-69.32	-76.19	3.50	5.80
12D4103R	-100.00	25.40	-92.24	-101.19	3.50	5.30