



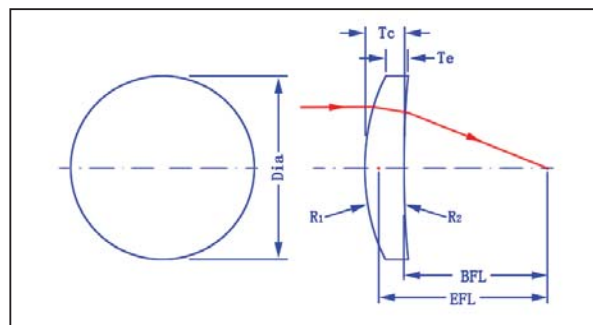

特 性 Specification		
材 料	Material	ZnSe(Zinc Selenide)
设计波长	Design Wavelength	10.6 μm
焦距公差	Focal Length Tolerance	±1%
外型公差	Diameter Tolerance	+0.0/-0.1mm
厚度公差	Thickness Tolerance	±0.2mm
面 型	Surface Accuracy	$\lambda/2@632.8\text{nm}$
光 洁 度	Surface Quality	60-40
偏 心	Centration	<3 arc min
有效孔径	Clear Aperture	>80%
倒 边	Bevelling	<0.2×45°
镀 膜	Coating	IR AR Coating 8-12 μm

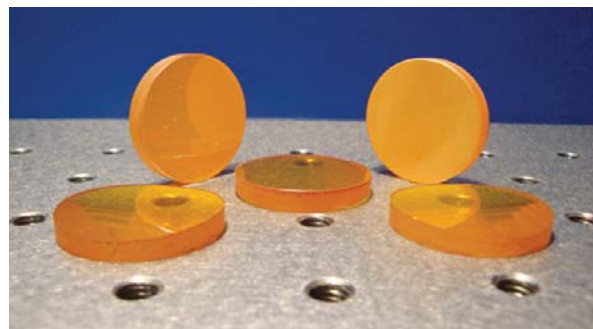

技术参数 TECHSPEC							
编 号 No.	有效焦距 EFL(mm)	外圆直径 Dia(mm)	曲率半径		后 焦 距 BFL(mm)	中心厚度 Tc(mm)	边缘厚度 Te(mm)
			R1(mm)	R2(mm)			
14E7246R	15.00	12.70	7.50	9.03	11.62	2.90	2.00
14E7276R	20.00	12.70	7.50	7.85	15.33	3.00	2.70
14E7963R	40.00	12.70	10.88	11.32	33.56	3.00	2.90
14E7185R	25.40	25.40	15.50	22.58	20.90	4.70	2.00
14E7981R	50.00	25.40	15.50	16.90	42.47	4.00	3.10
14E7996R	75.00	25.40	20.97	23.27	66.65	4.00	3.50
14E7031R	100.00	25.40	28.36	32.62	91.77	4.00	3.60
14E7667R	150.00	25.40	42.71	50.66	141.80	4.00	3.70
14E7898R	200.00	25.40	57.69	69.69	191.91	4.00	3.80
14E7495R	500.00	25.40	146.10	181.59	492.01	4.00	3.90
14E7117R	750.00	25.40	219.57	274.54	742.02	4.00	3.90
14E7199R	1000.00	25.40	293.05	367.49	992.03	4.00	3.90