



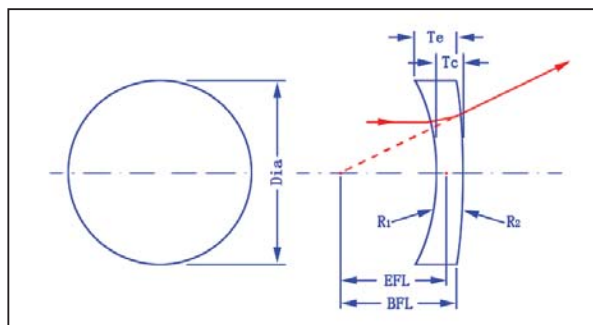

特 性 Specification		
材 料	Material	ZnSe(Zinc Selenide)
设计波长	Design Wavelength	10.6 μm
焦距公差	Focal Length Tolerance	±1%
外型公差	Diameter Tolerance	+0.0/-0.1mm
厚度公差	Thickness Tolerance	±0.2mm
面 型	Surface Accuracy	$\lambda/2@632.8\text{nm}$
光 洁 度	Surface Quality	60-40
偏 心	Centration	<3 arc min
有效孔径	Clear Aperture	>80%
倒 边	Bevelling	<0.2×45°
镀 膜	Coating	IR AR Coating 8-12 μm

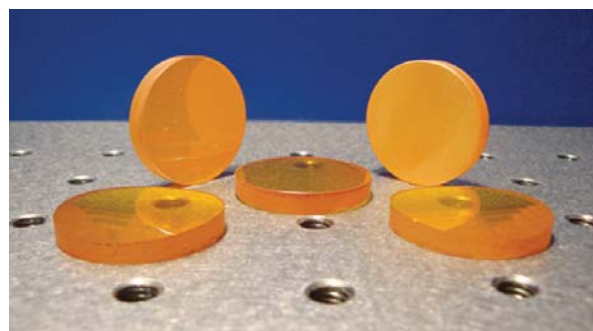

技术参数 TECHSPEC							
编 号 No.	有效焦距 EFL(mm)	外圆直径 Dia(mm)	曲率半径		后 焦 距 BFL(mm)	中心厚度 Tc(mm)	边缘厚度 Te(mm)
			R1(mm)	R2(mm)			
14F7769R	-15.00	12.70	7.50	13.47	-17.33	2.00	3.90
14F7134R	-20.00	12.70	7.90	12.63	-22.96	2.00	3.50
14F7185R	-40.00	12.70	7.65	10.88	-49.16	3.00	4.30
14F7733R	-25.40	25.40	15.50	31.57	-29.23	4.00	8.00
14F7601R	-50.00	25.40	15.56	23.00	-57.50	4.00	6.70
14F7053R	-75.00	25.40	15.53	20.97	-86.27	4.00	6.30
14F7785R	-100.00	25.40	21.65	28.36	-110.79	4.00	5.10
14F7113R	-150.00	25.40	33.56	42.71	-160.44	4.00	4.60
14F7321R	-200.00	25.40	45.92	57.69	-210.17	4.00	4.40
14F7639R	-500.00	25.40	118.98	146.10	-509.81	4.00	4.10
14F7589R	-750.00	25.40	179.73	219.57	-759.74	4.00	4.10
14F7573R	-1000.00	25.40	240.47	293.05	-1009.71	4.00	4.10